

SBL2 Series 3OH Model



Solar Powered LED Bollard



The 3rd generation SBL2 3OH Model solar powered bollard light was specifically designed to be capable for submersion (IP68) for overhead lighting Pathways, Bikeways, Minor Roads, Laneways, in locations where cyclones-hurricanes-typhoons, tidal surges, tsunamis, and generalised flooding is prominent and with specific power models designed for locations that are fully shaded throughout the day with only ambient irradiation available to fully recharge daily.

KEY FEATURES OF THE SBL2 OVER COMPETITORS & ON-GRID PRODUCTS

- Low cost and quick installation, no trenching, cabling or wiring required
- IP68 Certified (AS/NZS 60529:2004 IPx8, IP4x, IP6x) submersible to 3m depth
- IK10 Certified (IEC 62262:2002) can withstand impact from debris and vandalism
- Isolated from power outages for continuous illumination
- Up to 70% more autonomy than competitors at full power output dusk until dawn



From vandal attack, severe high wind events, flood disasters, monsoonal rain, crashing waves, tidal surges, golf ball size hail or just daily snow coverage, no similar product will out perform the IK10 impact resistant construction of the SBL2 3OH, making it the perfect asset for durability and continuous performance at full power dusk until dawn operation 365 days of the year in high risk or heavily shaded areas where continuous lighting is required.

TECHNICAL SPECIFICATIONS

Overview

■ Dome Material	SABIC SLX LEXAN (Highest UV Stabilised PC available)
■ Housing Material	SABIC LEXAN 203R (UV Stabilised)
■ Internal Materials	STAREX ASA
■ External Reflector	Stainless Steel Powder Coated (Optional)
■ LED Chips	8 x 5mm Piranha LED Super Bright - Asymmetrical Light Distribution 4300K +/- (Natural White) / 3000K (Warm White) - Symmetrical Light Distribution 4300K +/- (Natural White) / 3000K (Warm White)
■ Voltage	3.2V (ELV intrinsically safe no UL certification required for USA)
■ Operate Temp	-30°C ~ +60°C ambient (runs safely up to 100°C)
■ Maintenance	Annual clean and polish for peak performance
■ Warranty	10 Years (subject to SBL Warranty T&C's)
■ Certifications	— IP68 OFFICIALLY TESTED (AS/NZS 60529:2004 IPx8, IP4x, IP6x) — IK10 OFFICIALLY TESTED (IEC 62262:2002) — Photometric (IESNA LM-79-08) — Hazardous Area/CE/RCM (T.B.T)
■ Weight	Net Weight 3kg (6.6lbs) / SR 4.5kg (9.9lbs)

Solar Module

■ Wattage	5w Mono-Crystalline
■ Vmp (V)	5V
■ Imp (A)	1 Amp
■ Design Life	10 Years @ 100%

Battery

■ Type	3.2V 17Ah Cylindrical LiFePo4
■ Cycles	3700 (expected minimum)
■ Design Life	10 Years + (expected minimum)

Electronics



■ Design Life	10 Years + (expected minimum)
■ Runtime	Dusk until Dawn full power
■ On/Off	Solar Panel Voltage

Poles (25um anodised standard or powder coated)

■ Material	6106 T6 Aluminium Marine Grade
■ Grade	High Tensile / Light Weight
■ Durability	High Corrosion Resistance
■ Collar	25um Anodised
■ Hardware	Security Bolts 4 x M6 - 316 SS



IP68
Submersible



IK10
Vandal Resistant



No
Power Bills



Simple & Low
Install Cost



Clean Energy
Lighting





Minimal
Maintenance



Install
Yourself

SBL2 Series 3OH Model

Solar Powered LED Bollard

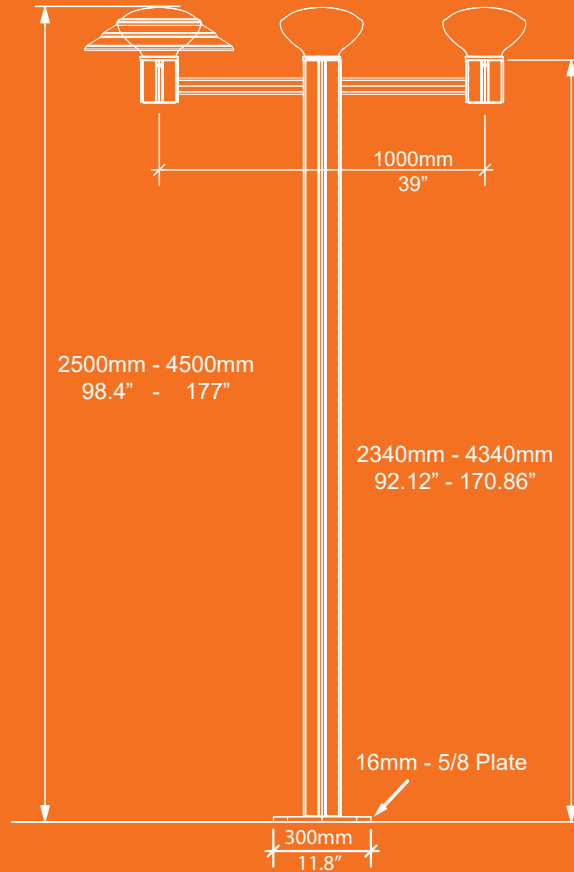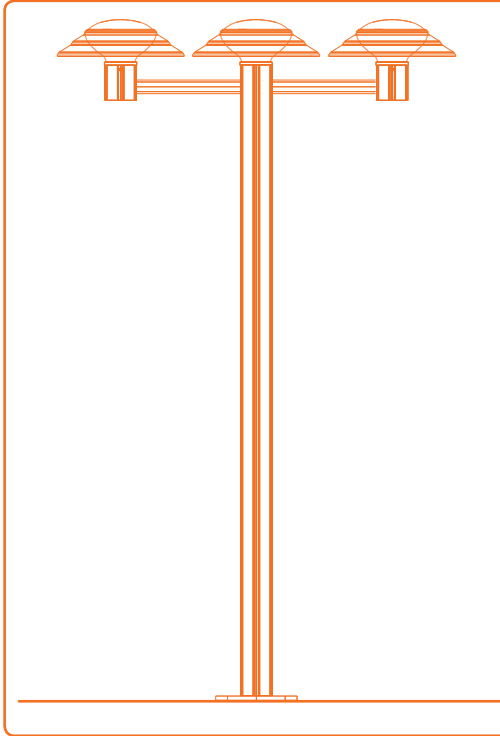


PHOTOMETRIC (IES files available)


GRID = 20m / 65.61' x 5m / 16.4'

All Values = Lux


SBL2-160ANW-3OH @ 3.5m / 11.48'

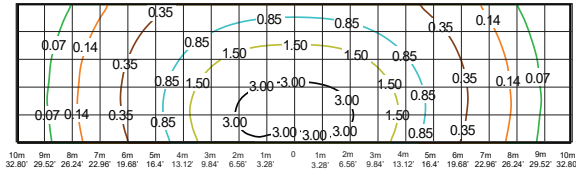


SBL2-200ANW-3OH @ 3.5m / 11.48'

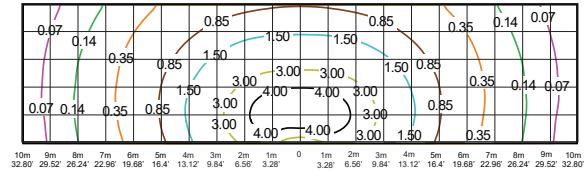

SBL2-240ANW-3OH @ 3.5m / 11.48'

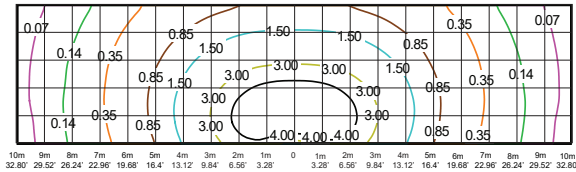

SBL2-280ANW-3OH @ 3.5m / 11.48'

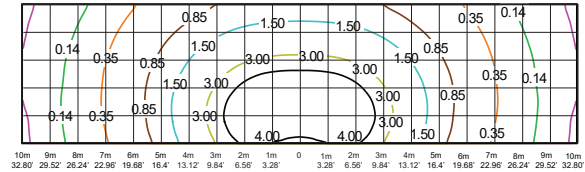

ORDER MATRIX

Power Model	LED Configuration	Mount Code	Dimension	Installed Height with Light Attached	Pole Finish Options
040 - 40mA	ANW	-23403BP	2340mm/92"	2500mm / 98.4"	A - 25um Anodised - Clear (Silver Colour)
080 - 80mA	SNW	-30403BP	3040mm/118.8"	2500mm / 98.4"	AB - 25um Anodised - Ebony (Near Black) ⁺
120 - 120mA	AWW	-28403BP	2840mm/111.8"	3000mm / 118"	PC - Black Satin 27219268 (Default Colour)
160 - 160mA	SWW	-33403BP	3340mm/114.9"	3500mm / 138"	PCCC - Custom Powder Coat Colour ⁺
200 - 200mA	LED DESCRIPTION ANW - Asymmetrical (180°) 4300K +/- LED SNW - Symmetrical (360°) 4300K +/- LED AWW - Asymmetrical (180°) 3000K +/- LED SWW - Symmetrical (360°) 3000K +/- LED	-38403BP	3840mm/151.2"	4000mm / 157.5"	From Dulux DURALLOY or ALPHATEC Colour Range (under 15 poles \$200 Minimum Charge Loading Added on top of total cost)
240 - 240mA		-43403BP	4340mm/170.9"	4500mm / 177"	⁺ Special Order Option with longer lead time
280 - 280mA		MOUNTING CODE DESCRIPTION 2BP - Base Plate			
		SR - for adding on reflector to light heads			

Ordering Example :

SBL2-200ANW-SR-33403BP = Triple Light 200mA Asymmetrical Natural White Light with SR Reflector on 3340mm Black Powder Coated Base Plate Pole

Power Model	LED	Reflector	Mount Code	Pole Finish Option
SBL2-		-		

Notes:

- Specifications subject to change without notice
- All light levels in lux

SBL2 Series 3OH Model

Solar Powered LED Bollard


GRID = 20m / 65.61' x 5m / 16.4'

All Values = Lux


ISOLUX SR MODEL

(IES files available)


SBL2-040ANW-SR3 @ 3.0m / 9.84'

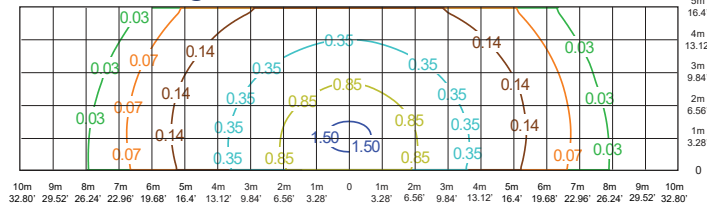


SBL2-080ANW-SR3 @ 3.0m / 9.84'

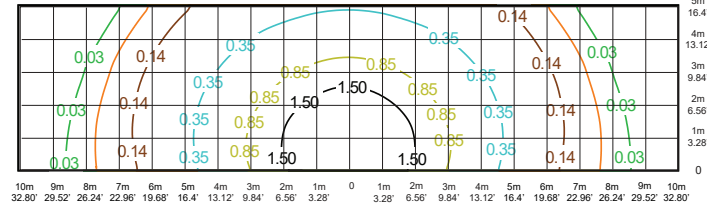


SBL2-120ANW-SR3 @ 3.5m / 11.48'

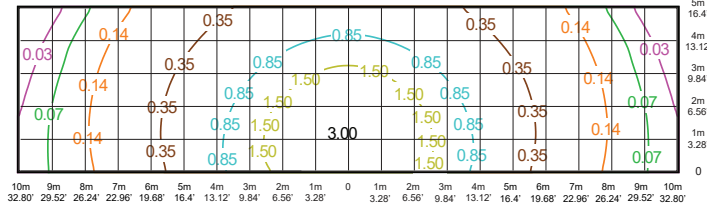


SBL2-160ANW-SR3 @ 3.5m / 11.48'

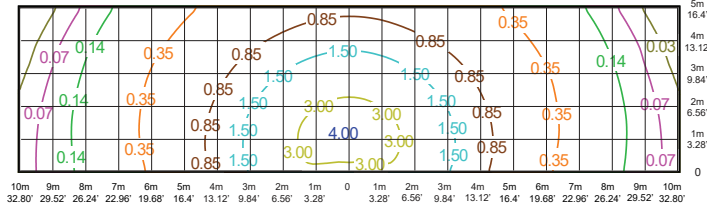

SBL2-200ANW-SR3 @ 3.5m / 11.48'

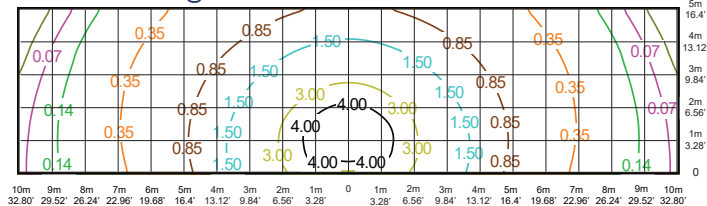

SBL2-240ANW-SR3 @ 3.5m / 11.48'

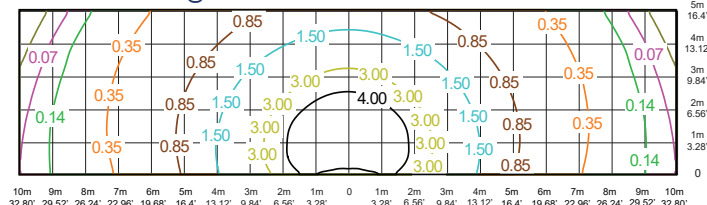

SBL2-280ANW-SR3 @ 3.5m / 11.48'

