

Leisure

Composite Products for the Leisure Industry



Dura Deck Aluminium 27mm Positive-Drain in Anthracite
Dura Cladding Flush Resist in Alaskan Cedar

High-performance GRP and composite timber solutions for leisure facilities including fire-rated decking and cladding and anti-slip flooring

Unlocking the Power of Composites™
» for the Leisure Industry

dura™
composites

Contents

Why Choose Composites?	2
Dura Deck Flip	3
Dura Deck Eco	4
Dura Deck Tile	5
Park Deck Type 140	6
Dura Balustrading	7
PVC Fascias, & Ranch Boards	8
Dura Deck Aluminium	9
Dura Bearers	11
Dura Pedestals	12
Dura Cladding Flush Resist	13
Dura Cladding Flush Aluminium	14
Micro Mesh Grating	15
Mini Mesh Grating	16
Standard Mesh Grating	17
Solid Top Grating	18
Anti-Slip Floor Sheets	19
Stair Tread Covers	19
Nosing Strips	20
Dura Tread Anti-Slip Strips	20
Value Added Services	21
The Dura Difference	22

About Us

Discover the d² product range from Dura Composites - the next generation of performance-improving composites. Available exclusively from Dura Composites, d² products feature unique designs, new material technology or manufacturing methods AND deliver class-leading performance.

We help companies of all sizes unlock the power of composites, and our client base includes businesses in the Marine, Leisure, Industrial, Construction, Rail, Transport and Landscaping sectors.

In 2017 and in 2020, Dura Composites was awarded the Queen's Award for Enterprise in recognition of our achievements at the forefront of composite material technology. Dura Composites' products are also available through a well-established global distribution network. Your local distributor can be found on our website.



Why Choose Composites for your Leisure and Recreation Project?

Advanced Product Performance

Composites have been around since the 1930s, and were first developed for use within boat hulls, plane fuselages and wings. Today's composites are used in a wide range of solutions from bridges to oil rigs and water slides to drum sets, and the design possibilities are vast.

One of the most popular emerging composites of the past 40 years has been Glass Reinforced Polymer (also known as GRP or fibreglass), which is a resin-based composite that's reinforced with a glass fibre. Dura Composites has a proven track record in supplying innovative GRP solutions for a variety of marine and leisure projects across the globe -including open mesh grating, duct covers and safety access ladders. For marine and waterside environments that are more tailored to leisure users, we also offer a composite timber decking solution known as Dura Deck®. Dura Deck® is manufactured from a combination of recycled plastics and hardwood waste and is an immensely versatile material which combines the traditional appearance of timber with the durability of an engineered composite.

Both product ranges (GRP Dura Grating and Composite Timber Dura Deck®) require no painting or treating over their long lifetime and in many cases are suitable for new build projects, or as a replacement for degraded timber decking where safe anti-slip qualities are required, thanks to their proven ability to withstand the harsh side effects of marine conditions better than traditional materials. Our knowledgeable team have decades of experience in the industry and are available now to discuss your project on 01255 440297.

Built-in Sustainability

It's not just the initial outlay costs that you should consider when deciding on a material for your project. It's important to consider the whole lifecycle of the material and all its associated costs, including installation, how long it will last and what kind of maintenance (if any) it will require to keep it functioning and looking it's best.

In marine environments, Dura Grating is algae resistant and low maintenance, making it not only one of the safest, but also one of the most cost effective marina walking surfaces on the market. Available in Standard, Mini and Micro Mesh each offering varying hole sizes to suit the environment in which it is laid, the unique patent-pending design of Dura Composites' d² grating offers improved light transmittance to support the needs of diverse marine life.

Dura's GRP products offer considerably low life cycle costs due to their maintenance free, corrosion resistant and impact resistant characteristics compared with traditional materials. They also have a design life in excess of 60 years and a reassuring 25 year product warranty.

Even after the products have been used for their intended purpose and reach the end of their lifecycle in the original context, they can be up-cycled or repurposed in other ways. We are happy to advise all customers on their specific scenarios.



Dura Deck® Flip

Our Dura Deck® Flip board takes two popular colours and combines them into one single decking board profile with one colour on one side and another on the other. There are three different colour combinations to choose from.

This innovative product allows the customer to use a single colour which can then be flipped later for a whole new look, or lets you create attractive deck designs featuring both complementary colours (such as framed decks).



This deck is produced via a co-extrusion process where a 360° outer armour is used to protect the core of the deck from the elements. As a result, Dura Deck® Flip is fire resistant to Class C, colour fade resistant, strength load resistant, stain resistant, FSC™ certified and also highly slip resistant.

Available in lengths of 3.66m, Dura Deck® Flip is easy to install and has a fantastic 15 year warranty. The innovative subsurface fixing system means no nails or screws need to go through the deck itself, creating a smart, uniform and barefoot friendly deck.

For more information refer to the Dura Deck Product Guide.



Product	Board Type	Board Thickness (mm)	Board Length (mm)	Board Width (mm)	Max Span (mm)	Weight Lin/m (kg)	Weight per Length (kg)	Boards per Pallet (pcs)
Dura Deck® Flip								
Dura Deck® Flip	Hollow	25	3660	150	400	3.10	11.35	168
	Solid					4.94	18.05	100
Fascia	Solid	10		180	Infill Only	2.19	8.56	100

Dura Deck® Eco

Our Dura Deck® Eco 146 has a traditional appearance that closely resembles natural wood. It features grooves on one side and a woodgrain finish on the reverse.

Available in Teak, Stone and Charcoal colours, it contains up to 87% recycled content, FSC™ certified and comes with a reassuring 10-year warranty. Its composite timber formulation never needs painting and has one of the lowest water absorption rates in the industry, which minimises the risk of over-expansion.

Dura Deck Eco 146



Dura Deck Eco 295



Dura Deck Eco is also available in a 295mm version which is twice the width of the standard board. Dura Deck® Eco 295 allows for wider spans of up to 550mm for both residential and commercial applications.




Dura Deck Eco 295 features the same woodgrain surface design as the Eco 146 allowing both models to be used within the same projects for maximum flexibility. The double width board can allow installs to be completed in half the time, saving labour and cost.

The innovative subsurface fixing system means no nails or screws need to go through the deck itself, creating a smart, uniform and barefoot friendly deck.

For more information refer to the Dura Deck Product Guide.

Product	Board Type	Board Thickness (mm)	Board Length (mm)	Board Width (mm)	Max Span (mm)	Weight Lin/m (kg)	Weight per Length (kg)	Boards per Pallet (pcs)
Dura Deck® Eco								
Dura Deck® Eco 146	Hollow	25	3660	146	400	3.05	11.16	132
	Solid					4.81	17.60	90
Dura Deck® Eco 295	Hollow	23	3660	295	550	6.56	24.01	66
	Solid					8.97	32.83	42
Fascia	Solid	9		230	Infill Only	2.88	10.54	100

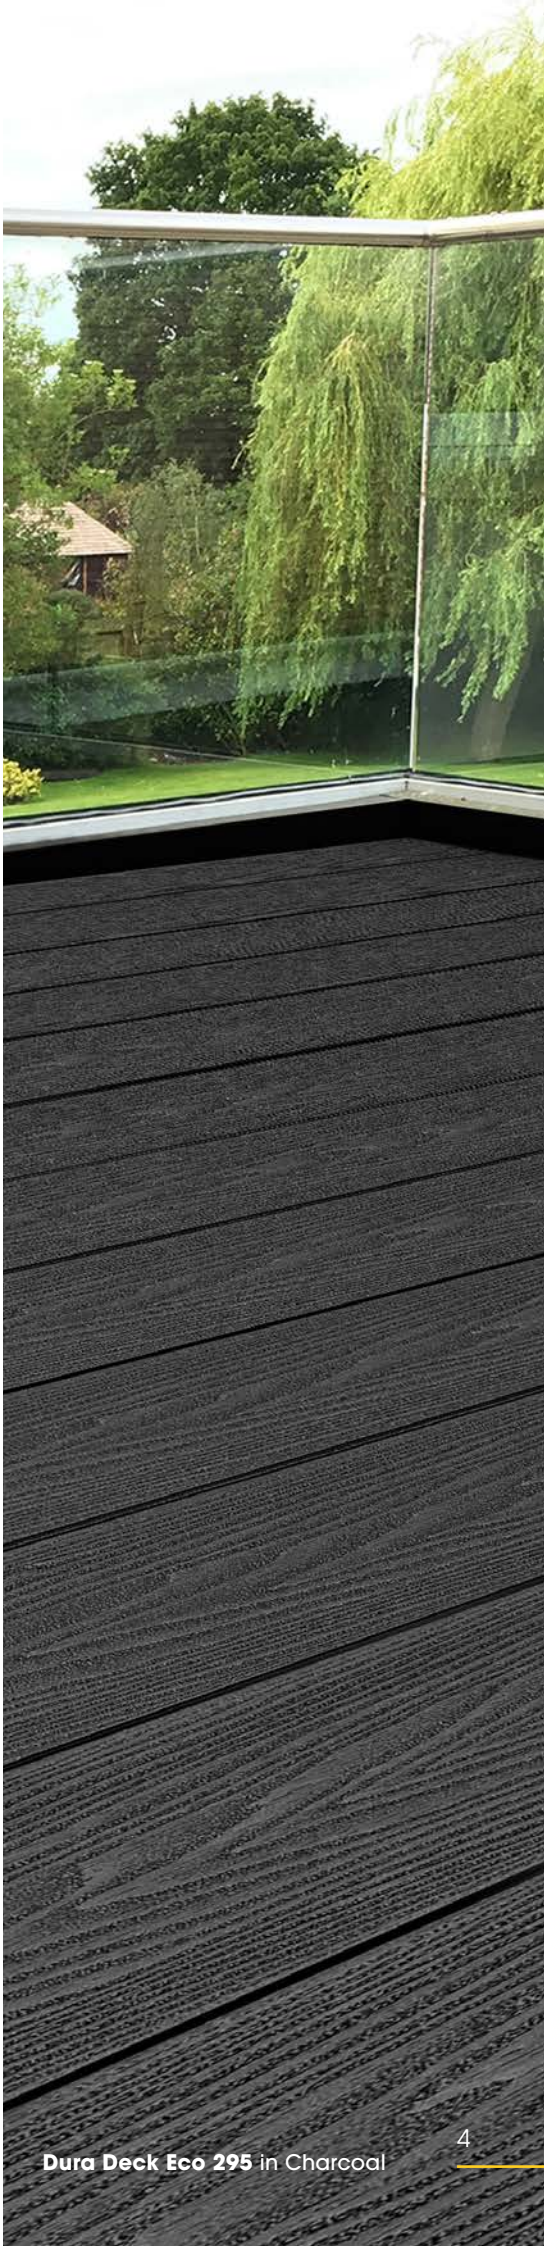



Dura Deck® Tile

Transform your outdoor space into a beautiful, ready-to-use decked area without the need for a professional landscaper. These FSC™ certified, easy-to-lay interlocking premium composite decking tiles require no specialist tools or skills.

Available in three great colours: Pebble Grey, Weathered Cedar and Mahogany, the tiles can be used to cover unsightly areas to refresh the look of your garden - or to create a brand-new decking area from scratch in a matter of minutes.



Dura Deck® Tile's patented design (Patent Number: GB 2586203) is superior to any other deck tiles on the market. The tiles can be added on top of any existing firm & flat surface for an instant transformation - with no need to wait before adding your furniture, plants or accessories onto your deck - so you can enjoy it straight away.

For more information refer to the Dura Deck Tile Brochure.




Product	Board Length (mm)	Board Width (mm)	Board Depth (mm)	Weight per Tile (kg)	Weight per Pack (kg)	Pack Coverage (m²)	Quantity In Box
Dura Deck® Tile							
Dura Deck® Tile	605	305	25	2.76	14.61	0.93	5
Straight Edge Ramps	297	74		0.36	4.84		12
Corner Ramps	367			0.43	1.83		4 (2 left and 2 right)

Pebble Grey

Park Deck Type 140

Our versatile Dura Park Deck range has a 10-year warranty and an expected 25-year service life, offering you an excellent long-term investment. The boards come in two sizes, 2440mm long x 140mm wide x 26mm thick and 3660mm long x 140mm wide x 26mm thick.

Dura Park Deck is available in three great colours: Shadow, Slate Grey and Coffee, to suit a broad range of leisure environments.

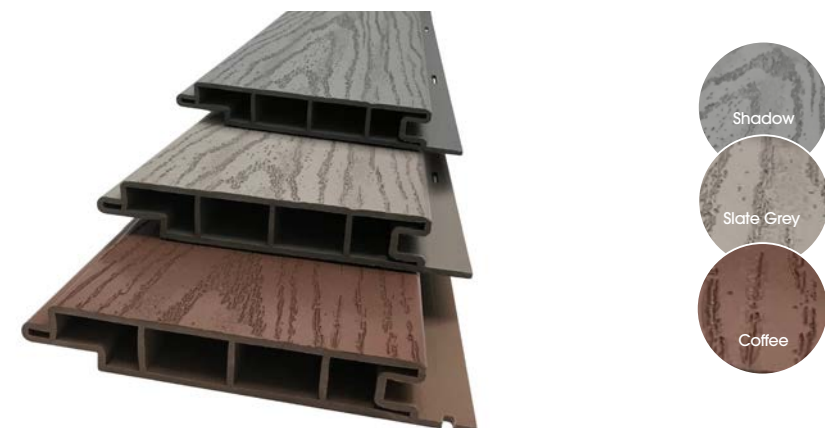

Dura Park Deck is an attractive, affordable, low maintenance option which gives you peace of mind and allows you to meet your responsibilities towards the public if you're installing within the commercial sector.

The decking is easy to install with standard tools and requires no specialist expertise. Fixings are hidden beneath the deck surface, leaving a tidy screw-free finish which is safe to walk on even in bare feet.



Product	Thickness (mm)	Length (mm)	Width (mm)	Maximum Fixing Span (mm)	Weight Lin/m (kg)
Dura Park Deck					
Type 140 Park Deck	26	2440	140	400	2.02
Type 140 Edge Trim	30.7	3660	47		
Type 140 Start Trim	24.5		25.4		



Slate Grey

Dura Balustrading

Our new Dura Park Deck PVC balustrading is the perfect complement to our Dura Park Deck PVC decking. Available in warm-to-touch high quality plastic, our PVC balustrading is easily assembled and provides a great frame for your decking area.

This modular safety stair handrail and barrier system is designed to be installed alongside our Dura Park Deck PVC decking in Shadow, Coffee or Slate Grey to enhance the outdoor area of your static caravan, lodge home, holiday home or park home. The smooth and sleek finish of the handrailing is both attractive and virtually maintenance free, so you can spend more time enjoying your outside space and less time maintaining it.



We offer a range of PVC balustrade components to help you complete your sundeck, veranda or terrace, with everything you need to create the perfect finish – from brackets to pickets, post caps and handrails. Please ask your Dura Composites Representative for the full list of our components.



*Colour available subject to minimum order quantity.

PVC Fascias

Our PVC Fascia Board can improve the look of your finished project and can help reduce the likelihood of wind-blown debris entering your deck boards.




Fascia Joiner Plate
305mm x 47.59mm

Fascia Corner Plate
305mm x 45mm

Fascia Board
3660mm x 105mm x 40mm

PVC Ranch Boards

Developed for fast and efficient installation, our patented PVC ranch board bracket system fixes to upright posts allowing you to easily clip boards in and out from the bracket. Specially designed for a clean finish with no visible fixings.

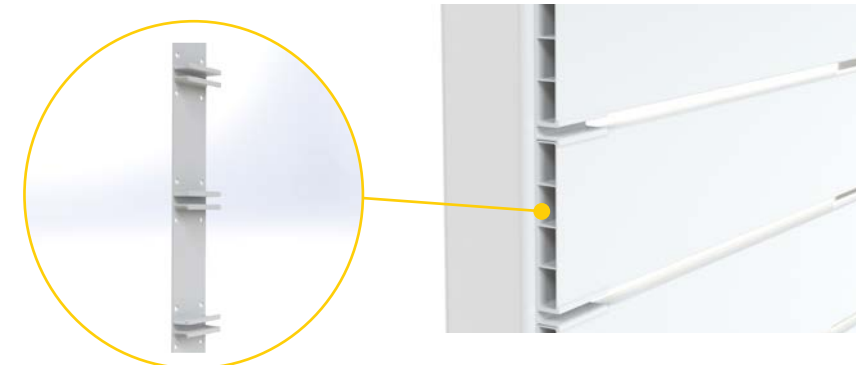

Ranch Board Bracket
834mm x 82mm

Ranch Board
153mm x 22mm
Available Lengths: 4000mm, 3600mm



Dura Deck Aluminium

Due to its lightweight design and ease of installation, Dura Deck Aluminium is perfect for hi-rise terraces and balcony applications. Its outstanding class A2fl-s1 fire rating and compliance with EU and UK government recommendations means it's great for buildings over 18 metres in height. Available in 3 beautiful matt-finish colours, Anthracite, Cedar and Mist, each aluminium board has a double skin with an extensively tested anti-slip surface and uniform underside to provide an attractive in-built soffit detail. With a 60 year service life and low maintenance requirements, Dura Deck Aluminium is also a perfect solution for public spaces.

For more information, please refer to the Dura Deck Aluminium Product Guide.



Matt-Finish Surface Texture of **Free-Drain 18mm** in Mist




18mm Free-Drain

This free draining decking solution allows water to drain through the gaps between the planks onto the area below. Dura Deck Aluminium Free-Drain 18mm is ideal for replacing degraded or non-compliant timber on balconies, low level terraces and walkways or new build balconies less than 6m² that do not require water management (Patent No. GB 2584725).

Spanning up to 850mm between centres based on a 2kN point load, the decking boards feature a unique design which is particularly suited for use with 'slide-on' cassette balconies, minimising the need for on-site finishing.

The lightweight nature of the boards make them ideal for projects where access restrictions make remedial work tricky using traditional materials. The V-Groove surface is cool in hot weather and has low slip potential in all directions.

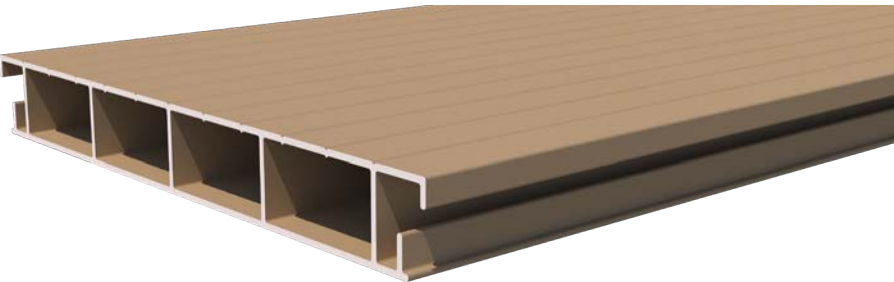

Product	Board Thickness (mm)	Board Length (mm)	Board Width (mm)	Visible Face Width When Installed (mm)	Max Span (mm)	Weight per Length (kg)
Dura Deck® Aluminium 18mm Free-Drain						
18mm Free-Drain	18	3660	150	150	850	4.61
Start Stop Trim			21.3	15		0.12
Main Trim	9.1	50	27.6	6-10		0.18
Cut Down Trim	19.2	3660	22	15		0.13
End Closure Trim	19		45	10		0.22

18mm Positive-Drain

Dura Deck Aluminium Positive-Drain 18mm deck boards meet the requirement for positive drainage, especially on stacked balconies of over 6m².

Water is guided to a gutter through the clever patented design (Patent No. GB 2584725). Spanning up to 1050mm between centres on a 2kN point load, the decking boards feature innovative shadow gaps and a reeded surface for that traditional deck look.



Product	Board Thickness (mm)	Board Length (mm)	Board Width (mm)	Visible Face Width When Installed (mm)	Max Span (mm)	Weight per Length (kg)
Dura Deck® Aluminium 18mm Positive-Drain						
18mm Positive-Drain	18	5800	150	150	1100	1.51
Starter Trim			41	20		0.46
Finishing Trim			28	37		0.24
End Closure Trim	19		45	10		0.22

27mm Positive-Drain

Perfect for balcony projects with in-built drainage trays where non-compliant timber is being replaced and large spans are required. Other suitable applications include commercial walkways and pedestrian bridges. Spanning up to 1400mm between centres on a 2kN point load, the decking boards feature a 27mm profile which means fewer structural supports are required for the balcony or terrace build-up, saving time and money.

The innovative tongue and groove interlocking design features a hidden fixing channel which hides the fixing screws and makes installation quick and easy.

Dura Deck Aluminium Positive-Drain 27mm deck boards meet the requirement for positive drainage as water is guided to a gutter through the clever patented design (Patent No. GB 2584725).



Product	Board Thickness (mm)	Board Length (mm)	Board Width (mm)	Visible Face Width When Installed (mm)	Max Span (mm)	Weight per Length (kg)
Dura Deck® Aluminium 27mm Positive-Drain						
27mm Positive-Drain	27	3660	178	150	1400	2
Starter Trim			61.2	41		0.84
Finishing Trim			53	38		0.47
End Closure Trim			45	10		0.27

Dura Bearers

Aluminium Dura Bearers offer a simple and long-life decking substructure solution for gardens, balconies and large commercial projects. Unlike timber subframes, which can twist, rot or warp over time, Dura Bearers are made from 6063 grade aluminium (T6) and have a greater strength-to-size ratio than traditional materials.



Available in three sizes (25mm, 50mm and 75mm), Dura Bearers can be installed directly onto hard surfaces, such as concrete or paving, as well as onto soft surfaces such as soil, sand or grass, (provided the area has been compacted and bricks, pavers or concrete slabs are placed beneath the bearers at suitable intervals).

When combined with our Dura Pedestal range as a complete A2 fire rated system, they can be used on sloping or uneven ground with gradients of up to 10° Degrees - which is equivalent to an amazing 1:6 fall!

Product	Height (mm)	Width (mm)	Length (mm)	Weight per Length (kg)
Dura Bearer				
Dura Bearer	25	48	3660	3.4
	50			3.5
	75			6.1

Use any Dura Bearer with any Dura Pedestal to create 42 different combinations. Installation is faster, easier and more stable than with fiddly plastic pedestals. A precise height can be created (which can be as small as a 10mm adjustment when installing any bearer option in combination with the 25.5mm pedestal).



Product	Height (mm)	Heights Achieved with 25mm Bearer		Heights Achieved with 50mm Bearer		Heights Achieved with 75mm Bearer	
		Min Height (mm)	Max Height (mm)	Min Height (mm)	Max Height (mm)	Min Height (mm)	Max Height (mm)
Dura Bearer & Pedestal Combinations							
Dura Pedestal	25.5	28	38	53	63	78	88
	50.5	53	65.5	53	88	78	113
	85.5	88	100.5	88	123	113	148
	117.5	120	132.5	120	155	145	180
	152.5	155	167.5	155	190	180	215
	187.5	190	202.5	190	225	215	250
	222.5	225	237.5	225	260	250	285

Dura Pedestals

Aluminium Dura Pedestals have an A2 fire-rating and a unique patent pending design which helps overcome even the most complex of installation challenges. Available in 7 different variants, the Anthracite coloured pedestals are designed to work seamlessly with our aluminium Dura Bearers to provide the most economical A2 rated support system on the market.



Unlike plastic pedestals, the Dura Pedestals have a single unit construction, with no fiddly separate components (such as bearer holders, slope correctors or spacers) to unpack and assemble. The tripod design features enhanced stability to mitigate the risk of rolling and can be butted right up to the wall or edge without the need for cuts. If your project requires a fall, or if your substructure is not level, each pedestal includes handy visual notches at 5mm intervals so you can easily secure your bearers at your desired height.

For more information on Dura Pedestals and Bearers and their installation process, please refer to the Aluminium Decking Substrate Technical Manual.



Product	Height (mm)	Length (mm)	Weight (kg)
Dura Pedestal			
Dura Pedestal	25.5	150	0.27
	50.5		0.33
	85.5		0.5
	117.5		0.58
	152.5		0.66
	187.5		0.75
	222.5		0.83



Dura Cladding Flush Resist

By choosing co-extruded composite timber Dura Cladding Flush Resist with its 360° protective armour for your project, you'll be investing in a 'fit-and-forget' solution that requires minimal ongoing maintenance during its long design life. Ideal for low-rise commercial or domestic use, or new build and refurbishment projects that require a Class B-s1,d0 fire rating in accordance with BS EN 13501-1:201.

Dura Cladding Flush Resist comes in three beautiful colours which can be used to create eye-catching designs. Whilst most cladding is designed to be installed either horizontally or vertically - with Dura Cladding Flush Resist, both orientations can be achieved easily using the same product profile.



The full Dura Cladding Flush Resist composite cladding system includes an innovative range of custom made aluminium trims and battens as well as no-fuss fixing screws, for ultimate ease of installation and sleek low-profile finish.

Each board colour has been tested in accordance with BS EN 13501, earning a Class B fire rating. For reference, only Dura Composite's Aluminium Cladding offers better resistance to fire! This guarantees a industry-approved material that's ideal for any property under 18 metres in height, including holiday lodges, clubhouses, golf clubs, garden rooms, garages and much more.

For more information refer to the Dura Cladding Flush Resist Brochure.



Product	Board Thickness (mm)	Board Length (mm)	Visible Face Width when installed	Maximum Fixing Span (mm)	Weight/ Lin m (kg)
Dura Cladding Flush Resist					
Dura Cladding Flush Resist	18	3660	150	600	2.07
Internal Trim	1.5		19.5		0.89
Reveal Trim			20		0.47
External Trim			35.6		0.72
Expansion Trim			21.5		0.40
Start/End Trim			20		0.35

Dura Cladding Flush Aluminium

Dura Cladding Flush Aluminium is available in contemporary colours including Cedar, Anthracite and Mist as standard, and Canvas and Copper as special order. The flush fitting design provides a decorative skin that is simple, clean and modern.

As well as wall cladding, Dura Cladding Flush Aluminium can be used for soffits, or to clad exposed framework on the underside of balconies. The 3660mm planks are lightweight and require minimal maintenance over their long lifecycle.



Dura Cladding Flush Aluminium is an A2 fire-rated cladding system which can be installed either vertically or horizontally with no overlap. It offers a versatile solution that meets the needs of high-rise, public sector and domestic cladding projects. When used with our aluminium battens and cladding trims the cladding planks create a safe, low-maintenance cladding solution that's fire-rated (in accordance with BS EN 13501-1:2018) for maximum peace of mind.

For more information refer to the Dura Cladding Flush Aluminium Brochure.

Product	Board Thickness (mm)	Board Length (mm)	Visible Face Width when installed (mm)	Maximum Fixing Span (mm)	Weight/ Lin m (kg)
Dura Cladding Flush Aluminium					
Dura Cladding Flush Aluminium	11	3660	150	600	1.19
Starter Trim	7.5		Hidden On Installation		0.19
Expansion Trim	14		21.5		0.32
Reveal Trim	30		39		0.46
Corner Trim	40		40		0.22
Universal End Closure Trim	14		30		0.37
Back Joint Trim	N/A		N/A	N/A	N/A




d² Dura Grating Micro Mesh

Dura Composites NEW Micro Mesh GRP grating features an anti-slip surface with a new finer grit which is ideal for water sports facilities and other recreational areas. The 10.5mm x 10.5mm open mesh prevents virtually all objects from falling through and is suitable for a wide range of footwear and sporting equipment.

d² Dura Grating Micro Mesh is available in Dark Grey as standard, with Sand and other colours available as special order. Minimum order quantities apply. If your project requires access ramps, 23mm Micro Mesh can be easily combined with other heavy grit products in the range.

For more information refer to the d² Dura Grating Brochure.

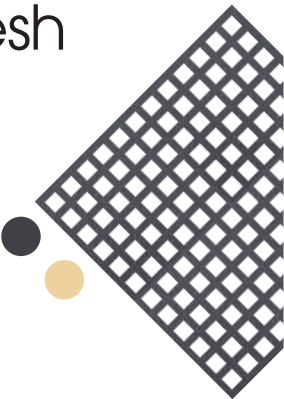

Product	Length (mm)	Width (mm)	Weight (kg/ sqm)	Open Mesh Size (mm)	Max Span (mm) at 1.5kN Point Load
d² Dura Grating Micro Mesh					
23mm	3042	1041	11.5	10.5 x 10.5	660
	4076	1300			
	4076	1560			

Load data based on deflection of L/100 using a point load of 1.5kN.


d² Dura Grating Mini Mesh

Dura Composites Mini Mesh GRP grating has all the benefits of our Standard Dura Grating but with a smaller open mesh area.

The smaller openings of our Mini Mesh Dura Grating prevents small objects from falling through, and complies with BS EN14122 Category B and the European 20mm Ball Falling Test requirement.

Mini Mesh Dura Grating is available in Dark Grey, Sand, Light Grey, Green and Teak colours and in a variety of thicknesses. For further information please refer to the table below.

For more information refer to the d² Dura Grating Brochure.

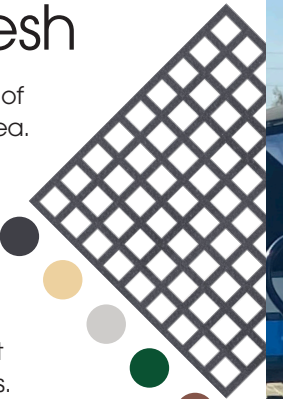

Product	Length (mm)	Width (mm)	Weight (kg/ sqm)	Open Mesh Size (mm)	Max Span (mm) at 1.5kN Point Load
d² Dura Grating Mini Mesh					
23mm	3012	1029	11.1	13 x 13	630
	4033	1269			
	4033	1511			
35mm	3030	1041	13.2	19.5 x 19.5	1590
	3667	1200			
45mm	3030	1041	15.3	19.5 x 19.5	2210
	3667	1200			
55mm	3030	1041	19.0	19.5 x 19.5	2500
	3667	1200			

Load data based on deflection of L/100 using a point load of 1.5kN.






d² Dura Grating Standard Mesh

Our Standard Mesh GRP grating is most suited for use within commercial marine applications as a walkway or slipway solution to help minimise the risk of slips or falls.

Dura Grating Standard Mesh is available in Dark Grey, Yellow, Green or Light Grey as standard, and in thicknesses of 26mm, 38mm and 50mm. The uniform construction of Dura Grating provides excellent bi-directional mechanical properties and is safe to walk on in all directions.

Standard Dura Grating is light, strong and non corrosive and can be supplied with a full range of stainless steel clips, clamps and hold down fixings to suit all situations.

For more information refer to the d² Dura Grating Brochure.

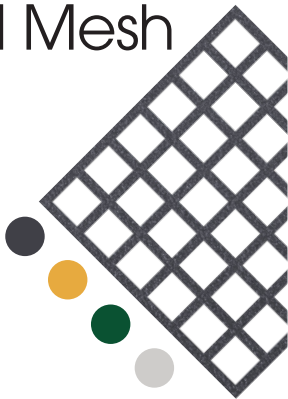

Product	Length (mm)	Width (mm)	Weight (kg/sqm)	Open Mesh Size (mm)	Max Span (mm) at 1.5kN Point Load
d ² Dura Grating Standard Mesh					
26mm	3043	993	10.3	32 x 32	860
	3669	1239			
38mm	3054	996	13.2	31 x 31	2500
	3664	1224			
50mm	3052	1057	15.7	28 x 28	2770
	3682	1267			

Load data based on deflection of L/100 using a point load of 1.5kN.


d² Dura Grating Solid Top

Dura Composites Solid Top GRP grating is lightweight with an extremely good anti-slip walking surface, suitable for wheeled trolleys or equipment often used in loading and storage areas.

One of the key benefits of Solid Top grating is the exceptional breaking strength under lateral force. The uni-directional continuous fibreglass reinforcement offers numerous advantages including rigidity, shock resistance, with no permanent deformation after overloading. These factors provide excellent mechanical strength and safety in marine environments.

Solid Top Grating is available in Dark Grey and Light Grey. See the below table for our available thicknesses.

For more information refer to the d² Dura Grating Brochure.

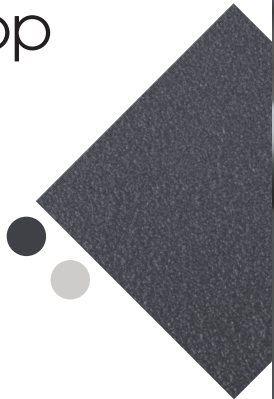

Product	Length (mm)	Width (mm)	Weight (kg/sqm)	Open Mesh Size (mm)	Max Span (mm) at 1.5kN Point Load
d ² Dura Grating Solid Top					
29mm	3699	1239	16.7	None	1450
	3043	993			
41mm	3663	1224	21.09	None	2100
	3054	996			
53mm	3682	1267	22.9	None	22.9
	3052	1057			

Load data based on deflection of L/100 using a point load of 1.5kN.



Anti-Slip Floor Sheets

Designed to be installed over new or existing structural members of steel, timber, concrete or aluminium based floors, Dura Tread provides a quick and economical anti-slip flooring solution. Our pultruded sheets exceed the higher performance E23 grade standard and deliver a better quality, stronger and longer lasting product than anything else on the market.

With a more consistent thickness for safer walkways and a better appearance than other floor sheet panels, typical applications for Dura Tread 5mm anti-slip floor panels include floor systems, walkways, work platforms and stair ramps.

GRP Gritted Dura Tread Solid Plate Anti-Slip Flooring is available in black, yellow or dark grey and has been designed for use in applications where durability and a long, maintenance-free life are critical. Our Standard Panel Size is 3m x 1.2m x 5mm (Other thicknesses are also available by special order).




GRP Stair Tread Covers

Dura Composites also offers a range of Dura Tread non-structural stair tread covers, gritted plates and stair nosing strips, which provide quick and cost-effective solutions to improving safety in potential slip hazard areas where the underlying structure is sound. Dura Tread covers are easy to install to existing concrete, wood or steel stair treads using a mechanical stainless steel fixing or general purpose adhesive to provide a highly visible, robust and durable slip resistant walking surface.

There are several different widths and colours available depending on your application requirements, all of which meet the highest demands in both safety and durability. The high visibility nosing highlights the leading edge of the step, and the low profile characteristics of the Dura Tread Cover allows it to be fitted to new or existing metal, concrete, or timber steps whilst only increasing the overall step height by 5mm. Each cover measures 345 x 3660mm as standard.

Dura fibreglass stair tread covers, floor sheeting and stair nosings are precision engineered anti-slip products, designed to provide a sure footed and safe solution for fitting over an existing slippery surface. The integral bonded grit produces a long lasting and hard wearing surface ideal for covering and making safe slippery walking surfaces such as metal, wood or concrete.

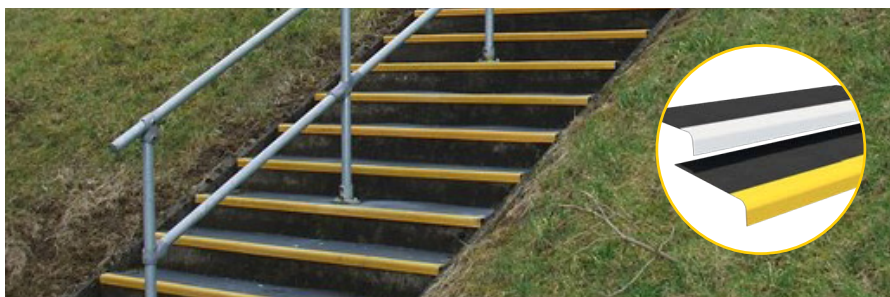

GRP Nosing Strips

Dura Tread Nosing Strips can be applied to a variety of stair tread materials such as concrete, wood, chequer plate or GRP grating to help mitigate the risk of slipping, tripping and falling. Quick and easy to install, Dura Tread Nosing Strips have a tough anti-slip gritted surface and are available in both Yellow and White to maximise visibility of the stair edge.

Each piece is 3660mm long as standard and the profile dimension is 55mm x 55mm with a thickness of 4mm which complies with the requirements of BS8300:2:2018. Choose Dura Tread anti-slip strips for a quick, cost effective solution to improving safety in slippery or hazardous areas, and for areas used by the public.




Dura Tread Anti-Slip Strips

Super-fast and easy to install, these 50mm strips can provide additional grip to almost any surface to give you peace of mind. Whether it's for timber pontoon decking, lakeside walkways, outdoor steps or access ramps, our gritted strips can be affixed to your existing floor surface to help mitigate the risk of slipping, tripping or falling.

Dura Tread Anti-Slip Strips are available in black, yellow or dark grey and can be easily combined for easy demarcation of transitional areas, differing floor levels, or to maximise visibility against the existing structural flooring material.

The strips are available in standard 1200mm and 3600mm lengths. Additional sizes can be cut to order and we can also pre drill holes for a small additional charge. Other colour variants are also available by special request.

If your project requires a complete flooring change with in-built anti-slip properties, we also offer a full range of composite decking planks and GRP grating panels as shown in this brochure.

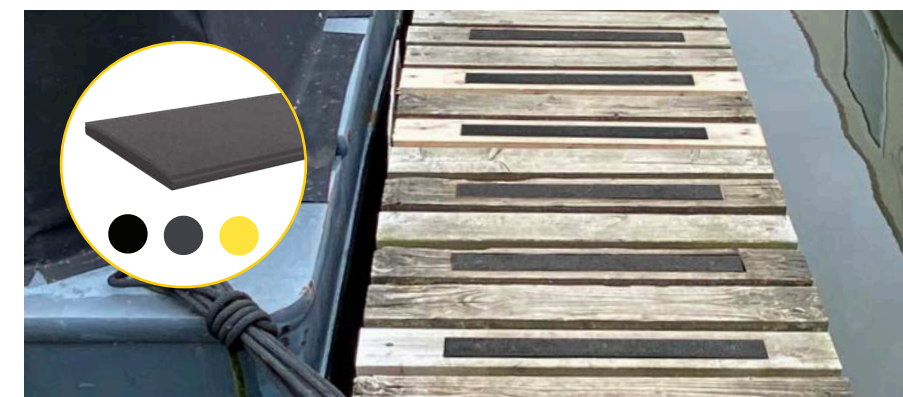


Value Added Services

CAD

Our Computer Aided Design (CAD) team use a variety of software including Inventor, Solidworks, Revit, 3Ds Max, Autocad and Navisworks to turn your ideas into reality. Working closely with the fabrication team, they can analyse, design and create bespoke fabrications tailored to your needs. Throughout the project they will be on hand to support you as you need them.


Using our CAD team can highlight any mistakes or clashes early on in the design phase and eliminate them before moving to the fabrication or installation phase.

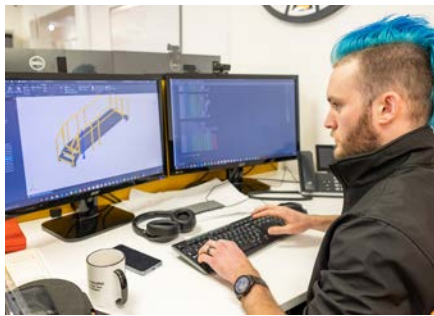

CAE

Our computer-aided engineering services utilise a range of analysis tools to simulate the effects of different conditions on our composite products and structures using multiple simulated loads and constraints.

Our CAE tools are also used to analyse and optimise the designs created within CAD software.

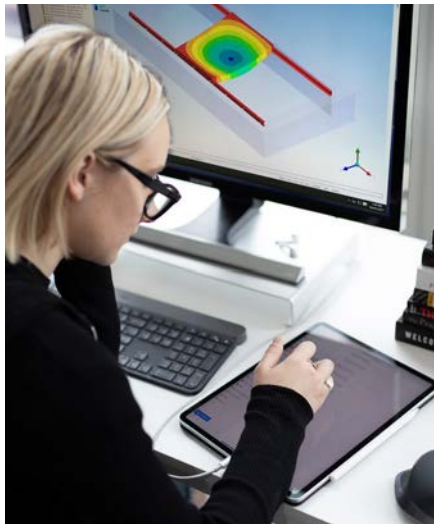

FEA

If you need structural efficiency gains in your designs we can make it happen using verification and analysis tools such as a Finite Element Analysis (FEA). Our in-house Structural Engineering Team can support you with design optimisation and failure analysis to analyse the strength of complex structures and systems, determine individual component behaviour, and accurately predict how sections will react under structural and thermal loads.


3D Laser Scanning

Our 3D laser scanning service uses the latest in area scanning technologies to create an exact 3D replica of your project site or premises. This can then be utilised by either Dura Composites' in-house designers to recreate your site specific requirements, or passed to your own internal team.




Site Surveys

Our experienced team are available to attend site surveys to assess the detailed requirements of your fabrication project and to supplement and verify the site information provided as part of the initial client brief. Initial site surveys for particularly tricky or challenging locations can be supplemented with our 3D laser scanning service to create exact measurements.

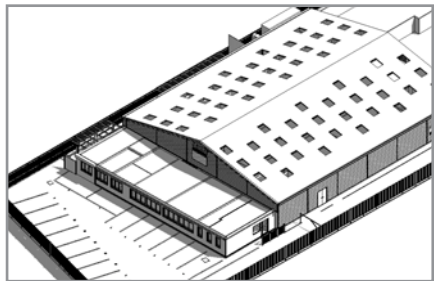

Fabrication Drawings

To turn designs into reality once the design is approved, we produce a set of detailed fabrication drawings. These ensure that each component part is assembled efficiently, cost effectively and to the required performance criteria.

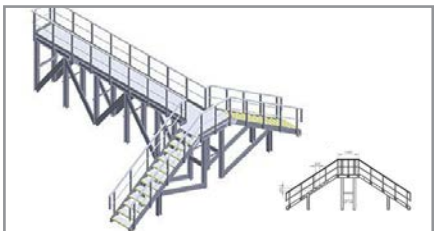


Let Dura Composites Unlock the Power of Composites for Your Next Project

Dura Composites is one of the world's leading suppliers of composite materials.

Here are a few great reasons to work with us:

- 1 Unique products backed up by demonstrably better specification**
 - We can help support your design services across all phases of the project lifecycle by providing detailed technical specifications for our award-winning product range.
 - Our live load testing data is available within our searchable Online Product Selector database to help you make decisions based on real data to ensure maximum safety for your project.
- 2 We only offer the right solution**
 - We believe that decisions on which products to use should be based on facts, not guesses or theories.
 - Whatever your scenario, you can be confident that we'll help ensure your project will meet the load performance and specification needed, otherwise we won't supply it!
- 3 25 Years of Multi-Industry Expertise**
 - We've had a reputation as leaders in innovation for a quarter of a century and take a collaborative approach to working with our Public and Private sector clients. We were awarded the prestigious Queen's Awards for Enterprise in 2017 and 2020 in recognition of our success in growing and championing the use of composite materials across the globe.
 - Our added value services include in-house CAD and Structural Engineering teams who can be utilised both for stand-alone design and as part of larger integrated design scheme.
 - Our specialist cutting and fabrication teams offer a full range of services to ensure you can install with confidence.

Your process with us at Dura:

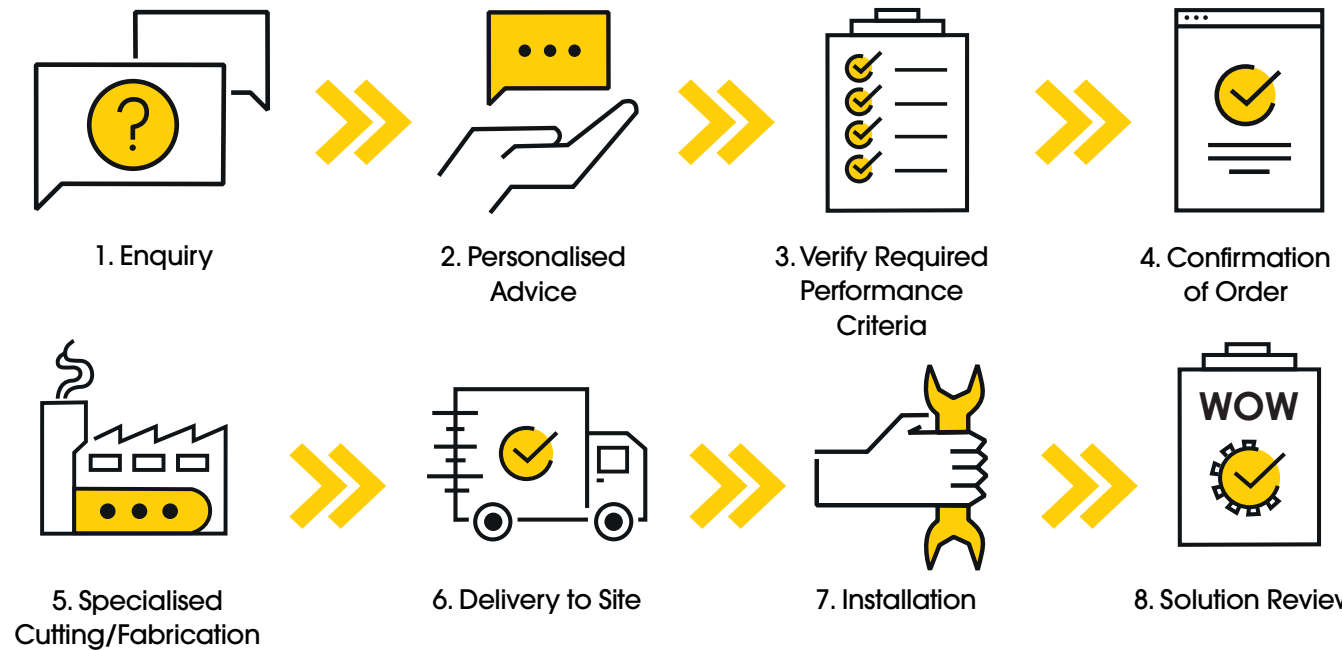



Look for FSC™
certified products



Head Office

Dura Composites Ltd
Dura House, Telford Road,
Clacton On Sea,
Essex, CO15 4LP
United Kingdom

Tel: +44 (0)1255 440297
Email: info@duracomposites.com

www.duracomposites.com

Unlocking the Power of Composites™ » for the Leisure Industry

Dura Deck® is a registered trademark of Dura Composites Limited in the UK.
Due to our policy of continual improvement we reserve the right to change specifications at all times
without prior notice.

© 2022 Dura Composites

dura™
composites